


Shenzhen Nordson Bo Communication Co., Ltd

PRODUCT SPECIFICATION

Parameter	Units	Spec
Product Name		Clockwise SMT Circulator
Product Model		SC030SA-360-390--300-1
Product Code		101.904.0165
Documentation Edition		V1.0
RoHS		RoHS 2.0
Frequency Range	MHz	360-390
Insertion loss	dB max	0.25 (Temp +25°C)
	dB max	0.30 (Temp -40°C~+90°C)
Isolation	dB min	23.0 (Temp+25°C)
	dB min	20.0 (Temp -40°C~+90°C)
VSWR	max	1.20 (Temp +25°C)
	max	1.25 (Temp -40°C~+90°C)
Power (Forward)	W min	300
Power (Reverse)	W min	300
IMD	dBc	≤-70dBc@2x43dBm
Direction of circulation		CW
Plating		Housing: Cu3 Ag4 ; PIN: Ag4
Reflow temperature	°C	260°C max for 10 seconds
Storage Temperature Range	°C	-55°C~+125°C

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

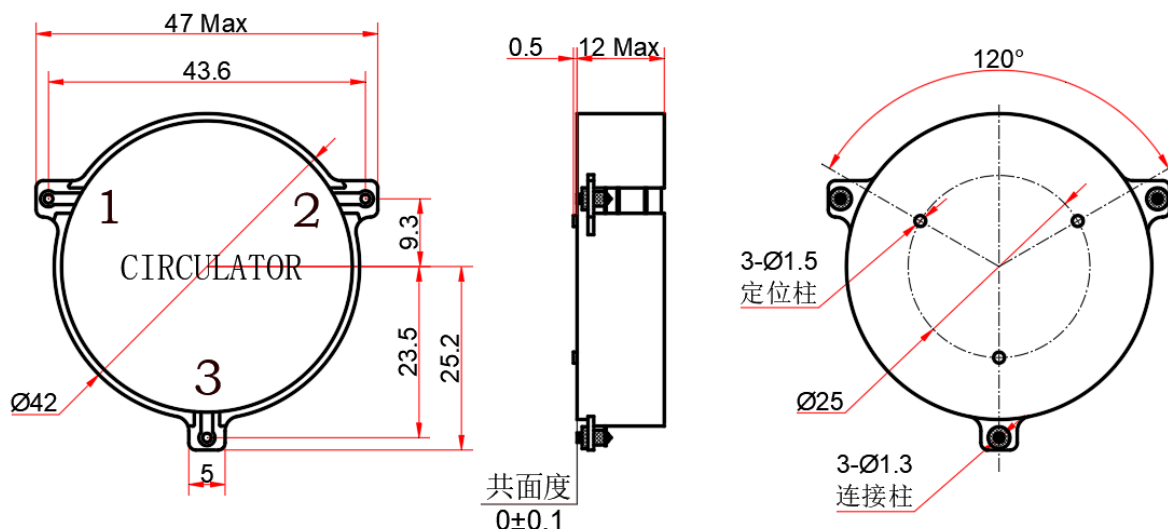

Shenzhen Nordson Bo Communication Co., Ltd

