


Shenzhen Nordson Bo Communication Co., Ltd

PRODUCT SPECIFICATION

Parameter	Units	Spec
Product Name		Clockwise Embedded Isolator
Product Model		DI130SD-2500-2700-100-1
Product Code		NA
Documentation Edition		GG01-A01
RoHS		RoHS 2.0
Frequency Range	MHz	2500-2700
Insertion loss	dB max	≤0.25(Room Temp) ≤0.30(Over Temp)
Isolation	dB min	≥25.0(Room Temp) ≥23.0(Over Temp)
VSWR	dB min	≤1.15(Room Temp) ≤1.20(Over Temp)
Power	W	Pulse power 1000W Duty cycle 10%
Avg Power	W	100
Load Power	W	100
Connector type		Microstrip line
Direction of circulation		CW
Temperature range	°C	-40°C~+90°C
Outline drawing	mm	19.05*25.4*8.0

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated

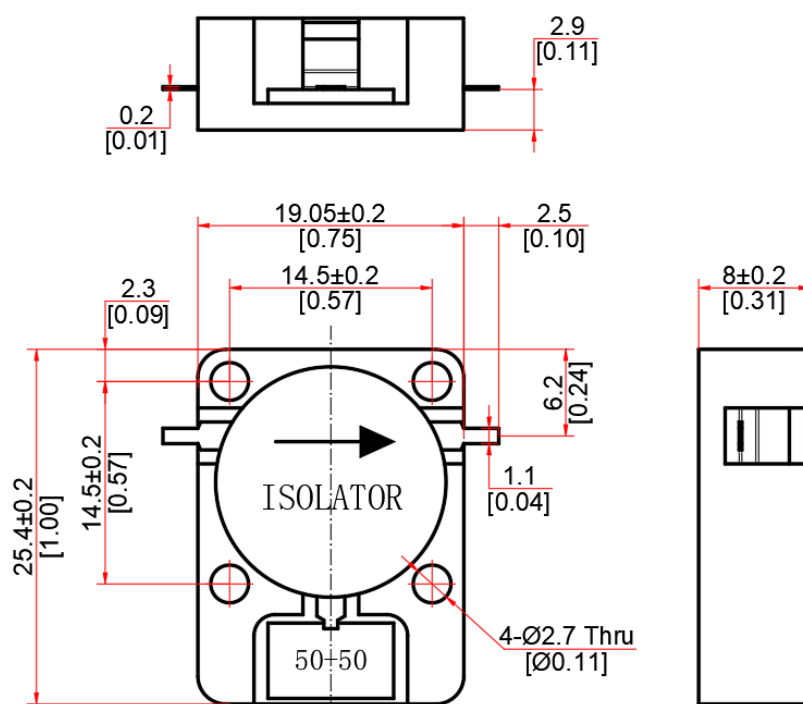

Shenzhen Nordson Bo Communication Co., Ltd