


Shenzhen Nordson Bo Communication Co., Ltd

PRODUCT SPECIFICATION

Parameter	Units	Spec
Product Name		Clockwise Embedded Circulator
Product Model		DC070SA-1700-2200-200-1
Product Code		101.904.0xxx
Documentation Edition		V1.0
RoHS		RoHS 2.0
Frequency Range	MHz	1700-2200
Insertion Loss	dB max	0.35 (Room Temp +25°C±5°C)
	dB max	0.40 (Over Temp -55°C~+85°C)
Isolation	dB min	22.0 (Room Temp +25°C±5°C)
	dB min	20.0 (Over Temp -55°C~+85°C)
Return Loss	dB min	22.0 (Room Temp +25°C±5°C)
	dB min	20.0 (Over Temp -55°C~+85°C)
Power FWD/REV/PK	W	200/200/2000
Direction of circulation		CW
Storage Temperature Range	°C	-60°C~+100°C

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

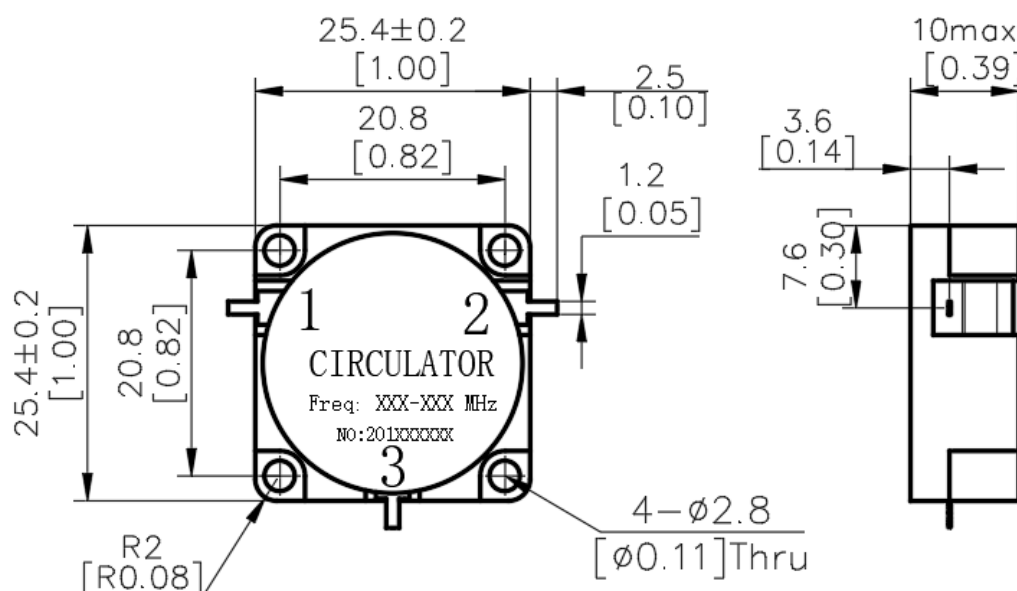

Shenzhen Nordson Bo Communication Co., Ltd

2nd floor, Building A, Juchuang Jingu Creative Park, Xili Xinguang Road, Nanshan District, Shenzhen
Tel: 400-049-8280 (86)0755-26701002/26701085 Fax:0755-26623329