


Shenzhen Nordson Bo Communication Co., Ltd

PRODUCT SPECIFICATION

Parameter	Units	Spec
Product Name		Clockwise Embedded Circulator
Product Model		DC800PA-7700-8400-20-1
Product Code		101.904.0xxx
Documentation Edition		V1.0
RoHS		RoHS 2.0
Frequency Range	MHz	7700-8400
Insertion Loss	dB max	0.30（Room Temp +25℃±5℃）
	dB max	0.40（Over Temp -40℃~+90℃）
Isolation	dB min	23.0（Room Temp +25℃±5℃）
	dB min	20.0（Over Temp -40℃~+90℃）
Return Loss	dB min	23.0（Room Temp +25℃±5℃）
	dB min	20.0（Over Temp -40℃~+90℃）
Connector Type		TAB
PK Power	W	200
Avg Power	W	20
Direction of circulation		CW
Storage Temperature Range	℃	-55℃~+100℃

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

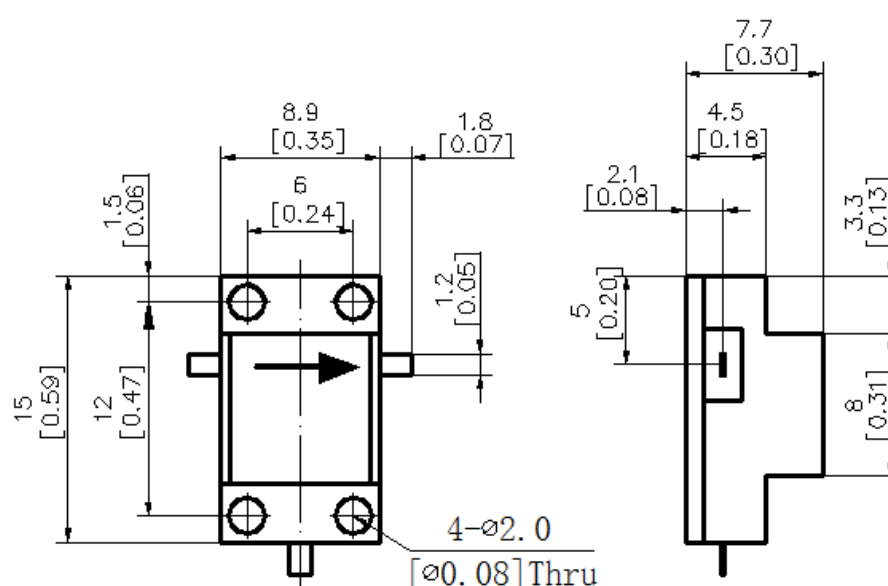

Shenzhen Nordson Bo Communication Co., Ltd

2nd floor, Building A, Juchuang Jingu Creative Park, Xili Xinguang Road, Nanshan District, Shenzhen
Tel: 400-049-8280 (86)0755-26701002/26701085 Fax:0755-26623329